



APPOTRONICS®

M Pro New Series

Breathtaking Color Immersive World

4K UHD Laser Projector

AL-MK650A / AL-MK750A
AL-MH650A / AL-MH750A



ALPD® Technology
Red Ratio>12%



4K/1080P



Optional Lenses



100% REC.709



6,500 to 7,500lm Brightness



Advanced Geometric Corrections



Integrated Control System

Premium 4K UHD Visuals

- ▶ ALPD laser light source delivers high brightness ranging from 6,500 to 7,500 lumens
- ▶ High Red ratio >12% delivers vibrant, lifelike images without distortion
- ▶ Four times pixel-shifting technology, producing an exceptionally smooth and detailed 4K UHD image quality
- ▶ Support HDR, HDR10+ & HLG. Full pipeline 10-bit color bit depth, faithful HDR image reproduction for an extraordinary visual experience
- ▶ MEMC dynamic frame interpolation, refresh rates up to 120Hz with less than 13ms latency, enabling smooth images free of stutter and tearing
- ▶ Advanced image enhancement comprehensively boosts image details and improves local contrast
- ▶ High native contrast ratio $\geq 1300:1$ delivers deep blacks
- ▶ Advanced dynamic contrast enhancement, with frame-by-frame fast current response, delivering an 8x performance improvement

Robust Reliability

- ▶ 20,000-hour light source lifespan
- ▶ Fully sealed light engine design with IP5X
- ▶ Patented internal circulating cavity heat dissipation for high efficiency and low noise
- ▶ Supports 5,000m high-altitude operation
- ▶ Modular design enables easy assembly, disassembly and maintenance

Flexible Installation Compatibility

- ▶ Optional lenses available, with throw ratio ranging from 0.5:1 to 2.48:1
- ▶ Motorized lens shift, supporting $\pm 50\%$ vertical and $\pm 20\%$ horizontal shift
- ▶ 360° installation, easily adapting to complex applications
- ▶ Multi-point geometric correction, supporting up to 62x32 control points
- ▶ Equipped with built-in the Graphic Mode, enabling accurate and consistent multi-color reproduction
- ▶ 100~240V AC support, enabling operation at low voltage without brightness loss

APCS

- APCS: Appotronics Control Software, easily manage your projectors and enhance functionality
- ▶ Automatically detects devices on the local area network (LAN)
 - ▶ Supports RS232 and RJ45 command control
 - ▶ Supports schedule setting function
 - ▶ Powerful multi-point geometric correction
 - ▶ Real-time operational status monitoring and proactive error warnings
 - ▶ Supports firmware upgrade and configuration file import

M Pro Specification

Model		AL-MK650A	AL-MK750A	AL-MH650A	AL-MH750A
Display Technology		DLP™ chip x 1, DLP™ projection system			
Panel Size		0.47"DMD			
Resolution		3,840×2,160		1,920×1,080	
Brightness ^①		6,500lm	7,500lm	6,500lm	7,500lm
Light Source		ALPD® Laser Phosphor			
Light Source Lifetime ^②		20,000h			
Contrast		Native Contrast: ≥1300:1 Full On/full Off: ≥100,000:1			
Uniformity		≥95%			
Color Gamut ^③		Rec.709			
Optional Lenses ^④		0.5:1 (manual) , 0.7-0.9:1, 1.0-1.6:1, 1.54-2.48:1			
Screen Size		80"~300"			
Blending		Vertical & Horizontal Adjustment: V: ±35°, H: ±35° 4-Point Keystone Correction, Curved Surface Correction (9 Points), Multi-Point Correction ^⑤			
Lens Shift		Vertical: ±50%, Horizontal: ±20%, Motorized			
Input Resolution		4K 60HZ, 1080P 120HZ			
Terminal Interfaces	Signal Interfaces	HDMI in ×2; HDMI out; USB-A×2 (Supports 5V=2A) ; HDBaseT			
	Audio Interfaces	S/PDIF out			
	Control Interfaces	LAN(RJ45); RS232(DB9); 3D SYNC×2(in/out); 3D IR OUT; USB-B			
Power Supply		100~240VAC 50/60Hz			
Power Consumption	Typical Power	550W	600W	550W	600W
	Standby Power	0.5W			
Installation		360° Installation			
Operation Noise ^⑥		36dB (Standard)			
Dimensions ^⑦		460mm×388mm×138mm (L×W×H 18.1"× 15.3"×5.4")			
Weight ^⑧		12.5kg (27.6lbs)			
Temperature ^⑨		0~40°C (32°F~104°F)			
Humidity		10%~80% RH (No Condensation)			

① Based on ISO21118 standard.

② Around this time, light output will have decreased by approximately 50%. Actual time may vary according to the operating modes, environment and other user behaviors.

③ Calculated based on the equivalent area of the color gamut.

④ Lens shift support: TR 0.5: 1 (V: -5%/+40%, H: ±10%); other models (V: ±50%, H: ±70%).

⑤ Multi-point correction supported by APCS.

⑥ The test data was obtained at ambient temperature of 25°.

⑦ Structural protrusions and the lens are not included.

⑧ Lens is not included.

⑨ Light source brightness may decrease depending on operating temperature. When projector is operating at high temperature or at high altitude, brightness will decrease correspondingly. Light output of projector will be reduced to 50% if ambient temperature exceeds 40°C(104°F).

① Based on ISO21118 standard.

② Around this time, light output will have decreased by approximately 50%. Actual time may vary according to the operating modes, environment and other user behaviors.

③ Calculated based on the equivalent area of the color gamut.

④ Lens shift support: TR 0.5: 1 (V: -5%/+40%, H: ±10%); other models (V: ±50%, H: ±20%).

⑤ Multi-point correction supported by APCs.

⑥ The test data was obtained at ambient temperature of 25°.

⑦ Structural protrusions and the lens are not included.


⑧ Lens is not included.

⑨ Light source brightness may decrease depending on operating temperature. When projector is operating at high temperature or at high altitude, brightness will decrease correspondingly. Light output of projector will be reduced to 50% if ambient temperature exceeds 40°C (104°F).

Optional Lenses

Model	AL-ML050FR	AL-ML070FR	AL-ML100MA	AL-ML153MA
Throw Ratio	0.5:1	0.7-0.9:1	1.0-1.6:1	1.54-2.48:1
Zoom/Focus Mode	Manual Focus	Motorized Focus & Zoom	Motorized Focus & Zoom	Motorized Focus & Zoom
Lens Shift	V: -5%, +40%; H: ±10%	V: ±50%; H: ±20%	V: ±50%; H: ±20%	V: ±50%; H: ±20%

Product dimensions

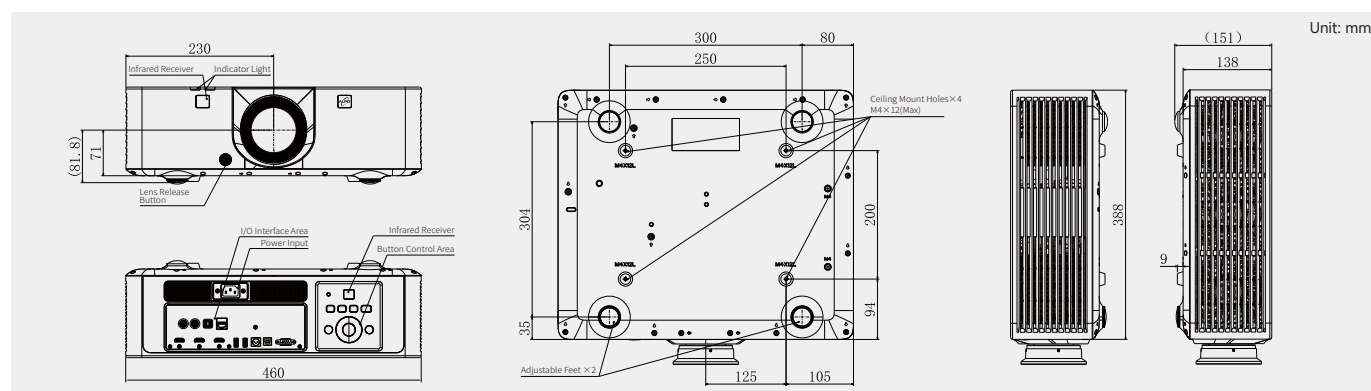

Appotronics Corporation Ltd.

Address: Appotronics Headquarters Tower, No. 8, Xiandong Road, Nanshan District, Shenzhen, Guangdong, China

Email: info.business@appotronics.com Web: appotronicsglobal.com